





POO4AC

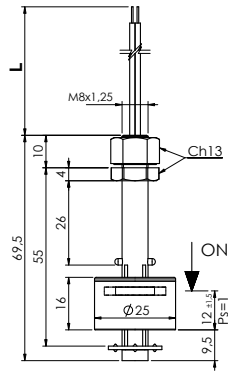

POO4F7

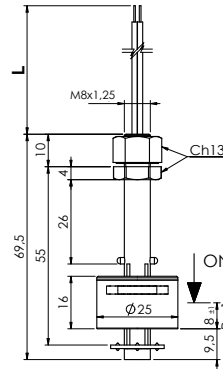

		Code Part number	
<b>Elektrische Verbindung</b> <i>Electrical connection</i>	<b>Material Schaft - Schwimmer</b> <i>Material Stem - Float</i>		ORANGE ODER SCHWARZ ORANGE OR BLACK NC WEISS ODER BLAU NC WHITE OR BLUE NO BRAUN/BROWN
<b>L = 500 mm</b> Leitungen/wires	Polipropilen Polypropylene	POO4AC - 100	POO4AC - 500
	Nylon Nylon	POO4F7 - 100	POO4F7 - 500
<b>L = 1 mt</b> Kabel/cable	Polipropilen Polypropylene	POO4AC - 110	POO4AC - 510
	Nylon Nylon	POO4F7 - 110	POO4F7 - 510
<b>L = 2 mt</b> Kabel/cable	Polipropilen Polypropylene	POO4AC - 120	POO4AC - 520
	Nylon Nylon	POO4F7 - 120	POO4F7 - 520
Um von N.C. auf N.O. überzugehen, muss lediglich der Schwimmer umgedreht werden <i>The contact can be converted from N.C. to N.O. by rotating the float upside down</i>			SPDT Kontakt SPDT Contact

Bei nicht isolierten Anschlüssen müssen die nötigen Vorkehrungen getroffen werden, um die mindesten Sicherheitsabstände zwischen den verschiedenen Klemmen zu gewährleisten. Für kundenspezifische Versionen (Materialien, Art der Verkabelung, Temperatur > 80°C, Spannung > 50V usw.) setzen Sie sich bitte mit unserer Vertriebsabteilung in Verbindung.

*When using non-insulated connections, the necessary precautions must be taken to ensure the minimum safety distance between the terminals  
For customized version (material, type of cable, temperature > 100°C, voltage > 50V, etc.) please contact our Customer Service*

Anwendung Use	POO4AH	Wasser - Säuren (Lebensmittelflüssigkeiten auf Anfrage) <i>Water - Acids (Alimentary liquids on request)</i>
	POO4F7	Mineralöle - Gasöl - Benzin <i>Mineral Oils - Diesel fuel - Petrol</i>
Befestigung Fixing		M8 x 1,25
Schaft Stem	POO4AH	Polipropilen Polypropylene
	POO4F7	Nylon
Schwimmer Float	POO4AH	Polipropilen Polypropylene
	POO4F7	NBR
Mutter Nut		Nylon
Kontaktart Type of contact		Reed N.A./N.C. (SPDT) <i>Reed N.O./N.C. (SPDT)</i>

Max Schaltleistung Max switch. capacity		40 W - (3 W SPDT)
Max Schaltstrom Max switch. current		1 A - (0,25 A SPDT)
Max Schaltspannung Max switch. voltage	POO4AH	50 V (250V auf Anfrage) <i>50 V (250V on request)</i>
	POO4F7	50 V
Spezif. Gewicht d. Flüssigkeit Specific fluid weight	POO4AH	> 0,75
	POO4F7	> 0,7
Betriebs temperatur Working temperature	POO4AH	-10°C / +80°C
	POO4F7	-10°C / +100°C
Gewicht Weight		~ gr 18