


P580AH

P580F8

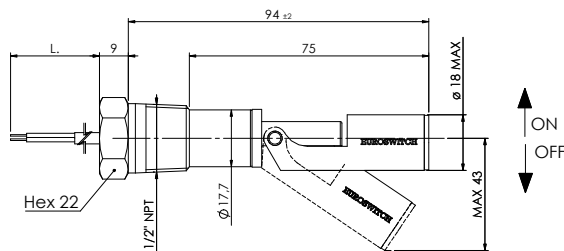

		Codice Part number	
Fissaggio - Ottone <i>Fixing - Brass</i>	Connessione elettrica <i>Electrical connection</i>	NERO BLACK	NC WHITE OR BLUE NO BROWN
X1 = 1/2" NPT	L = 500 mm fili/wires	Polipropilene Polypropylene	P580AH - 100
		Nylon Nylon	P580F8 - 100
	L = 1 mt cavetto/cable	Polipropilene Polypropylene	P580AH - 110
		Nylon Nylon	P580F8 - 110
	L = 2 mt cavetto/cable	Polipropilene Polypropylene	P580AH - 120
		Nylon Nylon	P580F8 - 120
Per passare da N.C. a N.A. è sufficiente capovolgere il galleggiante <i>The contact can be converted from N.C. to N.O. by rotating the float upside down</i>			Contatto SPDT <i>SPDT Contact</i>

Nel caso di connessioni non isolate devono essere prese le adeguate precauzioni per garantire la distanza minima di sicurezza tra i diversi morsetti.
Per versioni personalizzate (materiali, tipo di cablaggio, temperatura > 80°C, tensione > 50V, ecc.) contattare Euroswitch.

*When using non-insulated connections, the necessary precautions must be taken to ensure the minimum safety distance between the terminals.
For customized version (material, type of cable, temperature > 80°C, voltage > 50V, etc.) please contact Euroswitch.*

Impiego Use	P580AH	Acqua Water
	P580F8	Oli minerali - Gasolio - Benzina Mineral Oils - Diesel fuel - Petrol
Stelo Stem	P580AH	Polipropilene Polypropylene
	P580F8	Nylon
Galleggiante Float	P580AH	Polipropilene Polypropylene
	P580F8	Nylon
Tipo contatto Type of contact	Reed N.A./N.C. (SPDT) Reed N.O./N.C. (SPDT)	
Max potenza commut. Max switch. capacity	40 W - (3 W SPDT)	

Max corrente commut. Max switch. current	1 A - (0,25 A SPDT)	
Max tensione commut. Max switch. voltage	50 V	
Situazione di inquinazione Pollution situation	Normale Normal	
Peso specif. liquido Specific fluid weight	Polipropilene > 0,80 Nylon > 0,85 Polypropylene > 0,80 Nylon > 0,85	
Temp. in funzionamento Working temperature	P580AH	-10°C / +80°C
	P580F8	-10°C / +100°C
Peso Weight	~ gr 90	