




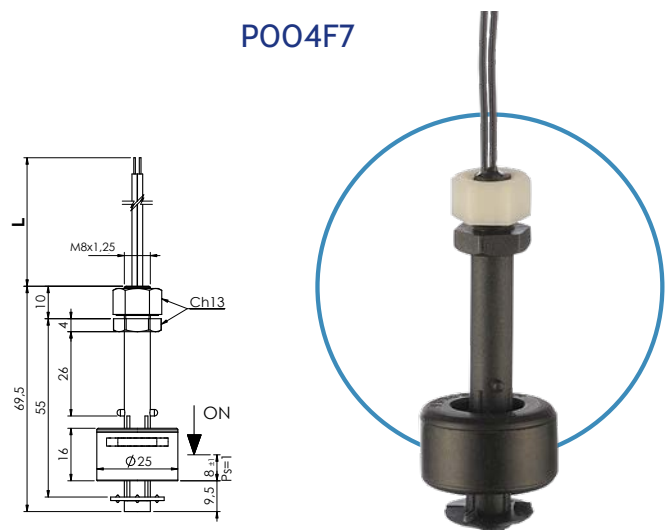

P004AC

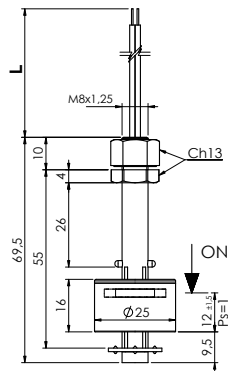

P004F7

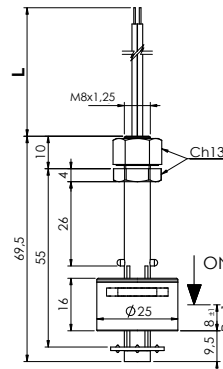

		Codice Part number	
Connessione elettrica <i>Electrical connection</i>	Materiale Stelo - Galleggiante <i>Material Stem - Float</i>		ORANGE OR BLACK — NC WHITE OR BLUE — NO BROWN
L = 500 mm fili/wires	Polipropilene <i>Polypropylene</i>	P004AC - 100	P004AC - 500
	Nylon <i>Nylon</i>	P004F7 - 100	P004F7 - 500
L = 1 mt cavetto/cable	Polipropilene <i>Polypropylene</i>	P004AC - 110	P004AC - 510
	Nylon <i>Nylon</i>	P004F7 - 110	P004F7 - 510
L = 2 mt cavetto/cable	Polipropilene <i>Polypropylene</i>	P004AC - 120	P004AC - 520
	Nylon <i>Nylon</i>	P004F7 - 120	P004F7 - 520
Per passare da N.C. a N.A. è sufficiente capovolgere il galleggiante <i>The contact can be converted from N.C. to N.O. by rotating the float upside down</i>			Contatto SPDT <i>SPDT Contact</i>

Nel caso di connessioni non isolate devono essere prese le adeguate precauzioni per garantire la distanza minima di sicurezza tra i diversi morsetti.
Per versioni personalizzate (materiali, tipo di cablaggio, temperatura > 100°C, tensione > 50V, ecc.) contattare nostro Ufficio Commerciale

*When using non-insulated connections, the necessary precautions must be taken to ensure the minimum safety distance between the terminals
For customized version (material, type of cable, temperature > 100°C, voltage > 50V, etc.) please contact our Customer Service*

Impiego Use	P004AH	Acqua - Acidi (Fluidi alimentari a richiesta) <i>Water - Acids (Alimentary liquids on request)</i>
	P004F7	Oli minerali - Gasolio - Benzina <i>Mineral Oils - Diesel fuel - Petrol</i>
Fissaggio Fixing	M8 x 1,25	
Stelo Stem	P004AH	Polipropilene <i>Polypropylene</i>
	P004F7	Nylon
Galleggiante Float	P004AH	Polipropilene <i>Polypropylene</i>
	P004F7	NBR
Dado Nut	Nylon	
Tipo contatto Type of contact	Reed N.A./N.C. (SPDT) <i>Reed N.O./N.C. (SPDT)</i>	

Max potenza commut. Max switch. capacity	40 W - (3 W SPDT)	
Max corrente commut. Max switch. current	1 A - (0,25 A SPDT)	
Max tensione commut. Max switch. voltage	P004AH	50 V (250V a richiesta) <i>50 V (250V on request)</i>
	P004F7	50 V
Peso specif. liquido Specific fluid weight	P004AH	> 0,75
	P004F7	> 0,7
Temp. in funzionamento Working temperature	P004AH	-10°C / +80°C
	P004F7	-10°C / +100°C
Peso Weight	~ gr 18	